

# Utility Cabinet with 3 Drawers

1 hr

APPROXIMATE ASSEMBLY TIME




2 PERSON ASSEMBLY

FLOOR AREA  
2M x 2M




REQUIRED ASSEMBLY SPACE


REQUIRED ASSEMBLY TOOLS




PHILLIPS SCREWDRIVER



FLAT HEAD SCREWDRIVER

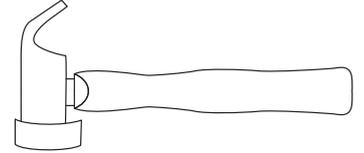

HAMMER

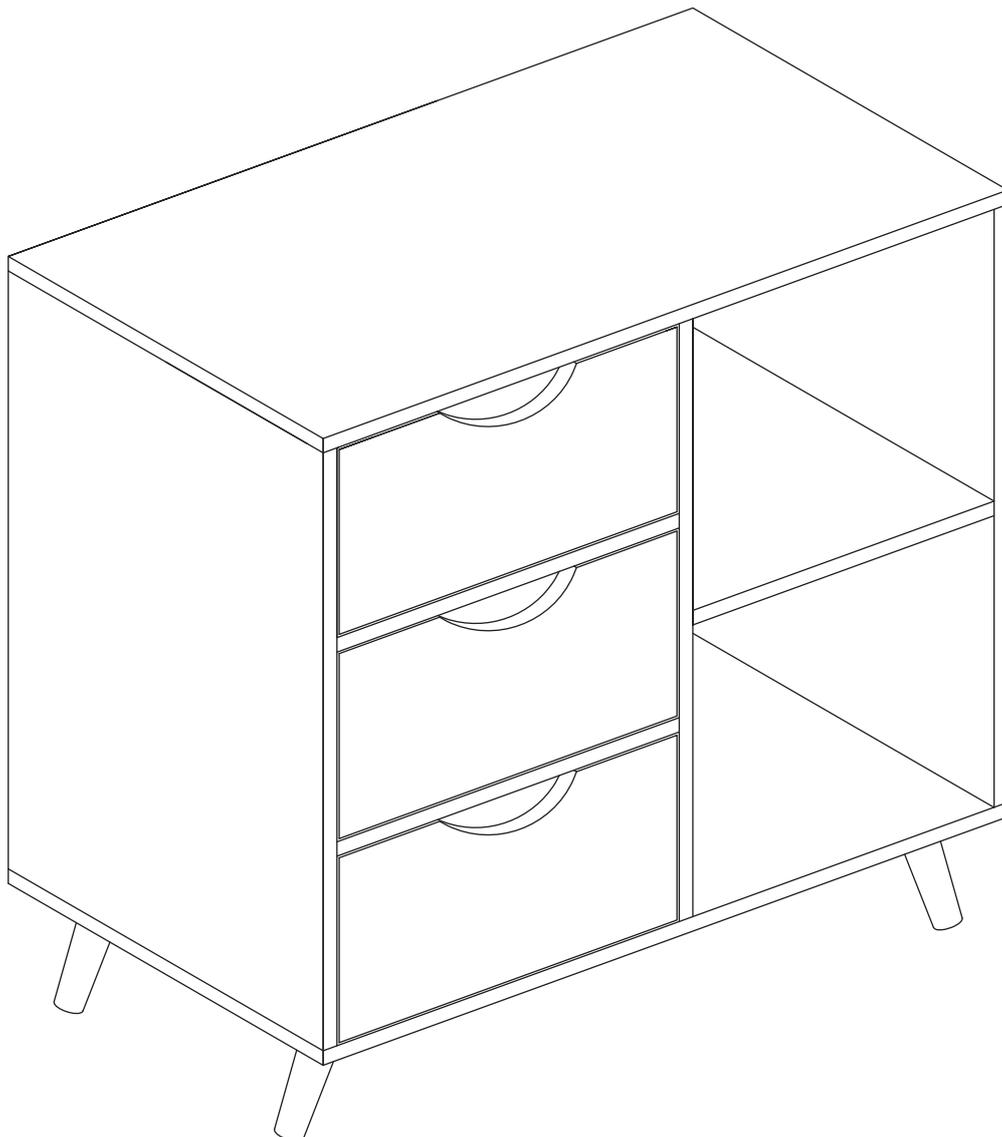

# Utility Cabinet with 3 Drawers

## Tips before you start:


1. Please check that all parts are present before you start the assembly of your furniture.
2. For ease and speed of assembly, we recommend that before you commence each step of the assembly, that you identify all the parts required for that step.
3. For larger items, please ensure that you have sufficient space and people (as indicated on page 1) to assemble your product safely.
4. We recommend that, where possible, all items are assembled near to the area in which they will be placed in use, to avoid moving the product unnecessarily once assembled.
5. For the protection of your furniture, we recommend that the product is placed on a protected surface during assembly to prevent any damage.
6. During assembly please take care not to over-tighten any fittings, as this may damage the product.
7. Always place the product on a flat, steady and stable surface.
8. Do not stand on the product. Do not use the product as a stepladder.
9. This product is intended for indoor, household use only as it is a non-industrial product.
10. Please use caution and care when lifting the product to avoid personal injury and/or product damage.

## Care and Maintenance of your Furniture

- Please periodically check all fittings and re-tighten as necessary.
- To clean your item, please use a damp cloth and wipe clean.
- Never allow any kind of liquid to remain on your furniture. Absorption can cause wood to warp or finishes to de-laminate.
- Please do not place hot items (eg. hot drinks) directly on to the surface.
- Please do not drag and pull your furniture.


# Utility Cabinet with 3 Drawers

## QUICKFIT

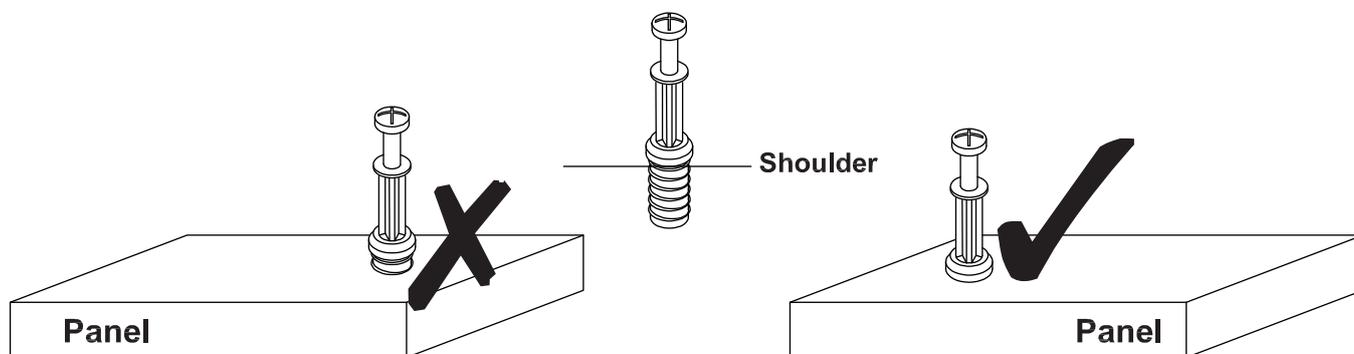

Tighten quickfit until shoulder is flush with panel. Do not overtighten or undertighten.


## CAM LOCK

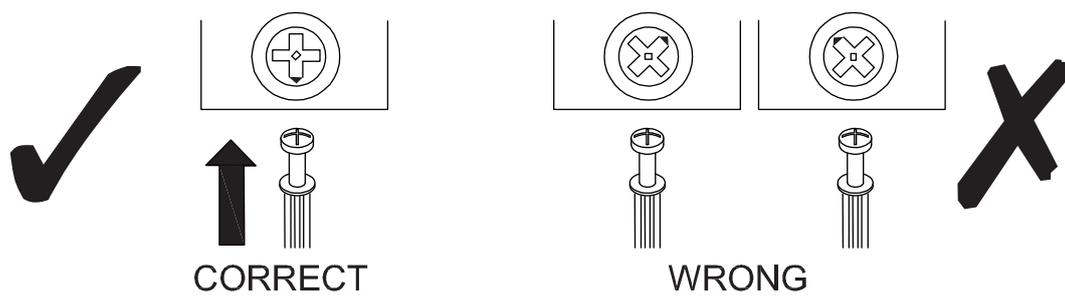

When fitting cam lock, ensure starting position is correct before you insert connecting quickfit.

Quickfit head should be in the centre of the cam lock when the two panels are joined.

**Cam lock should be inserted before quickfit.**

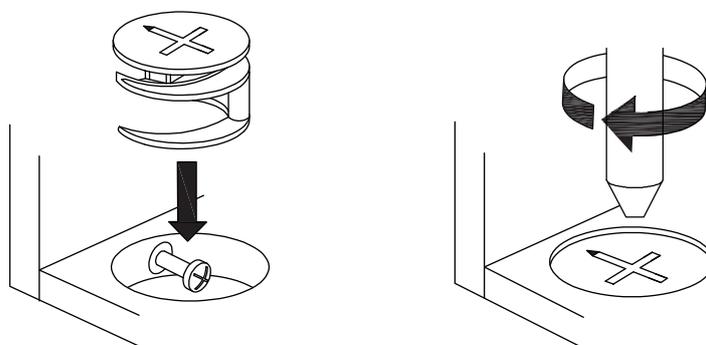


Turn cam lock clockwise to tighten.

# Utility Cabinet with 3 Drawers


## HARDWARE LIST



29 x A  
Screw



8 x B  
Wooden Dowel



4 x C  
Leg Support



21 x D  
Screw



2 x E  
Washer




1 x F  
Wall Strap



1 x G  
Wall Plug



8 x H  
Cover



12 x I  
Quickfit Screws



12 x J  
Cam Lock



12 x K  
Screw



6 x L  
Drawer Runner

















6 x M  
Drawer support



14 x N  
Nail

# Utility Cabinet with 3 Drawers


## PARTS LIST

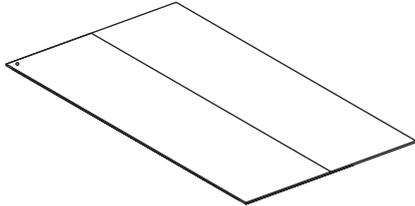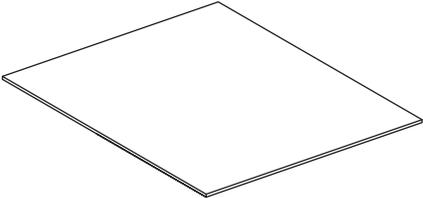					
1	1 PC	2	1 PC	3	1 PC
					
4	1 PC	5	2 PCS	6	1 PC
					
7	3 PCS	8	1 PC	9	3 PCS
					
10	3 PCS	11	3 PCS	12	1 PC
					
13	1 PC	14	4 PCS		

# Utility Cabinet with 3 Drawers

## STEP 1

Fix drawer runners (L) to part 1 using screws (K), as shown.

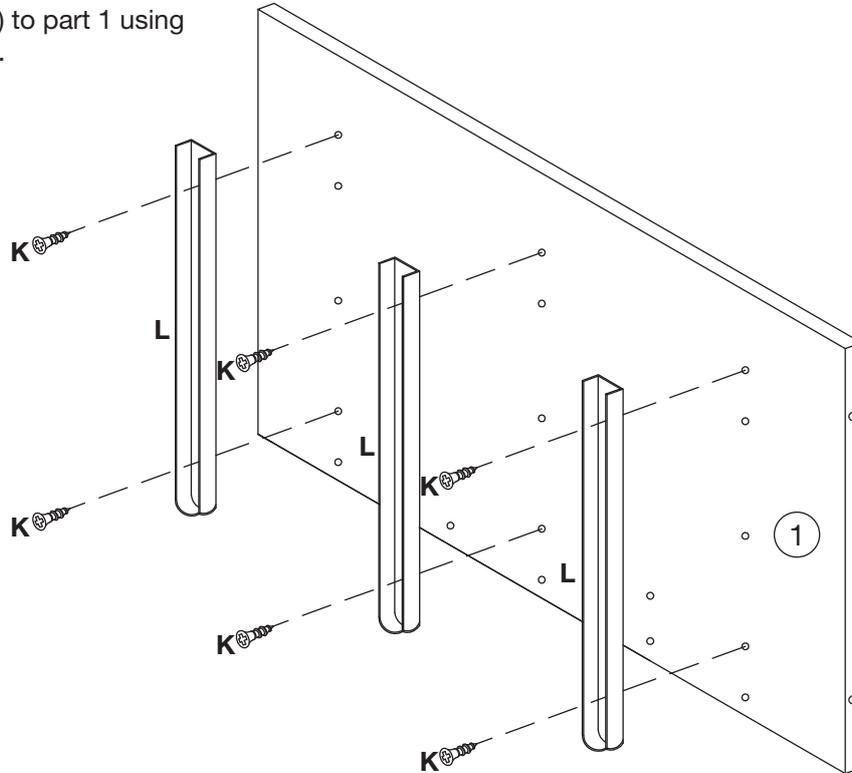


K x 6



L x 3

## STEP 2

Fix drawer runners (L) to part 2 using screws (K), as shown.

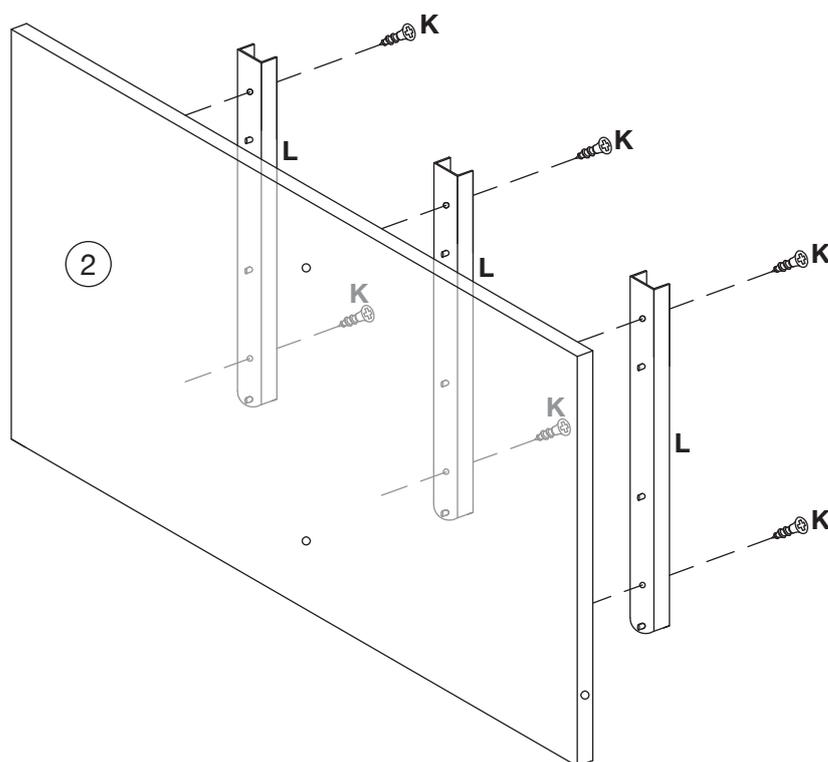

K x 6





L x 3

# Utility Cabinet with 3 Drawers

## STEP 3



Fix parts 2 and 3 to part 4 using screws (A), as shown.

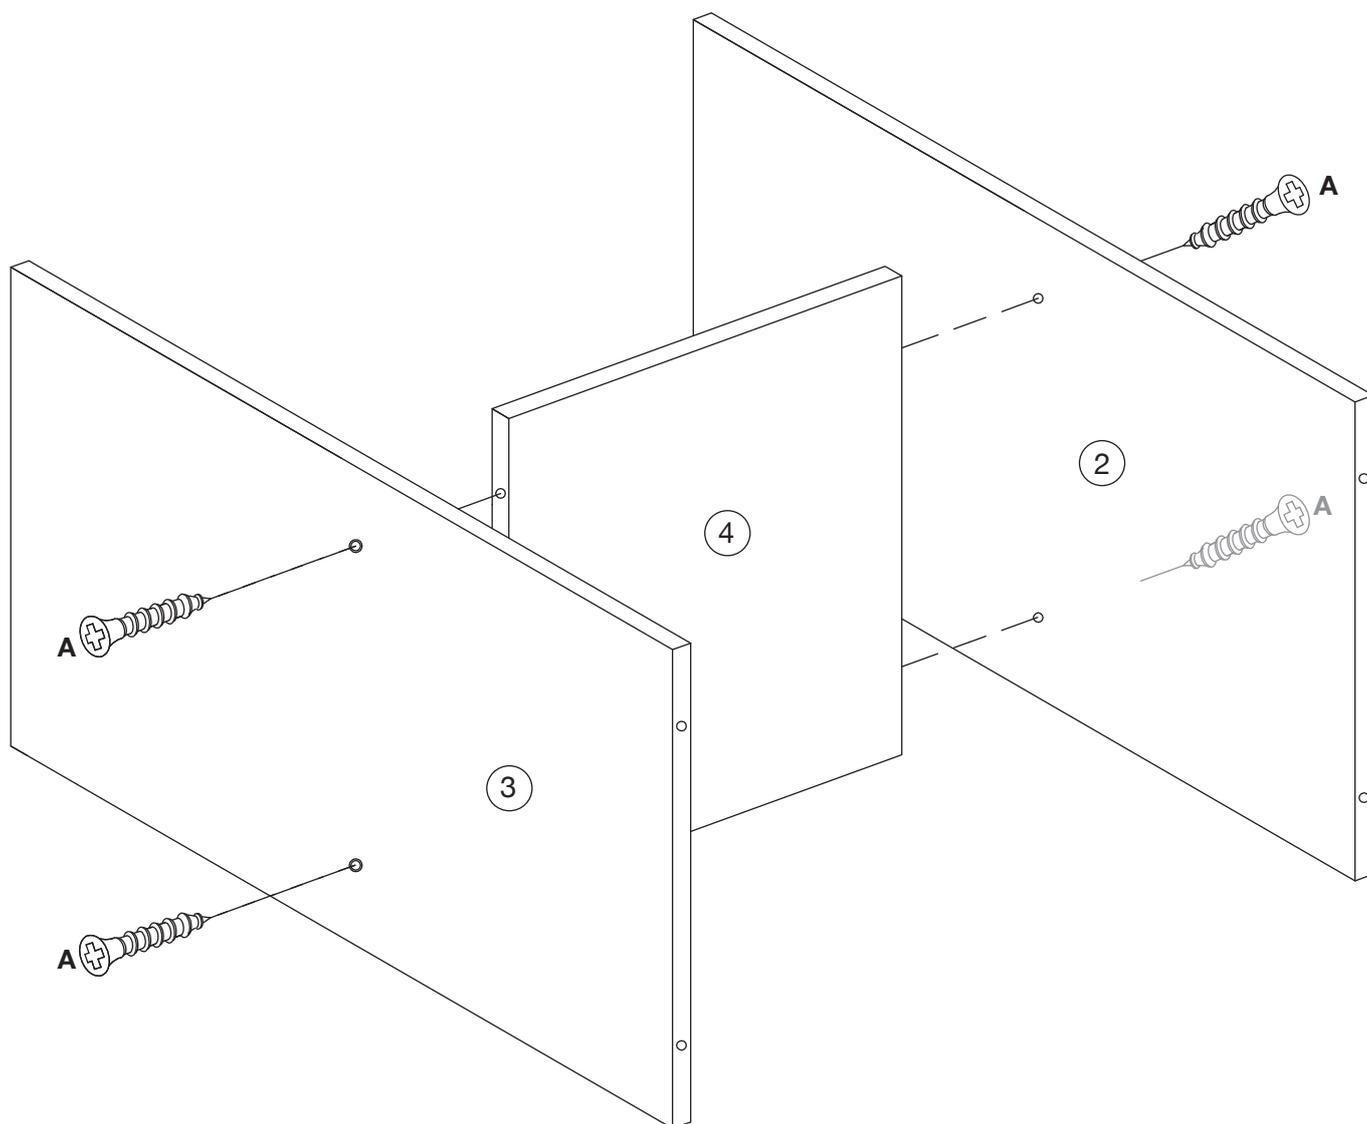

# Utility Cabinet with 3 Drawers

## STEP 4

Insert wooden dowels (B) into parts 5 and attach to parts 1 and 2, as shown.

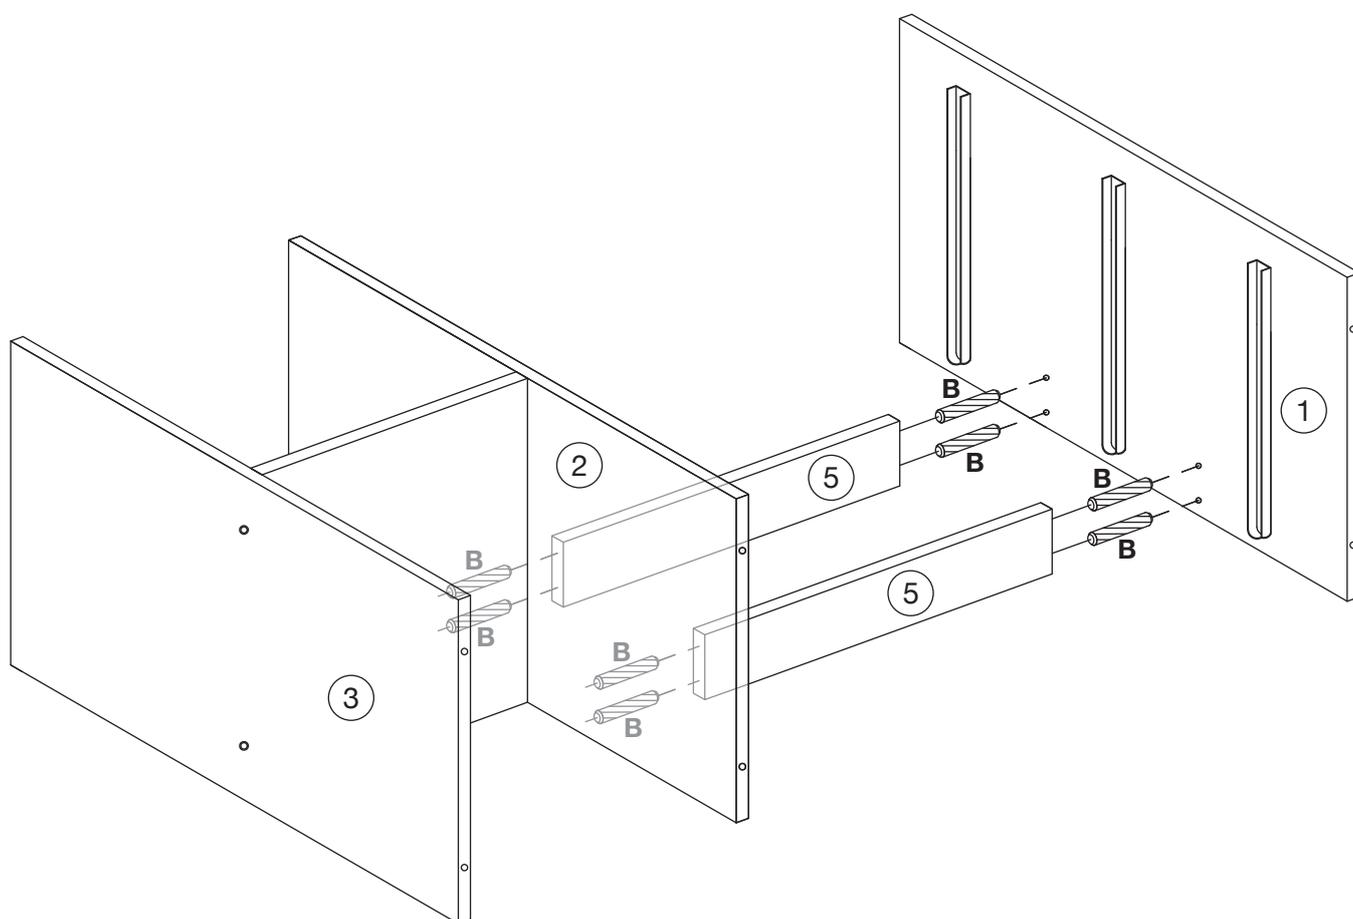


# Utility Cabinet with 3 Drawers

## STEP 5

Fix parts 12 and 13 to parts 1, 2 and 3 using screws (A), as shown.



A x 12




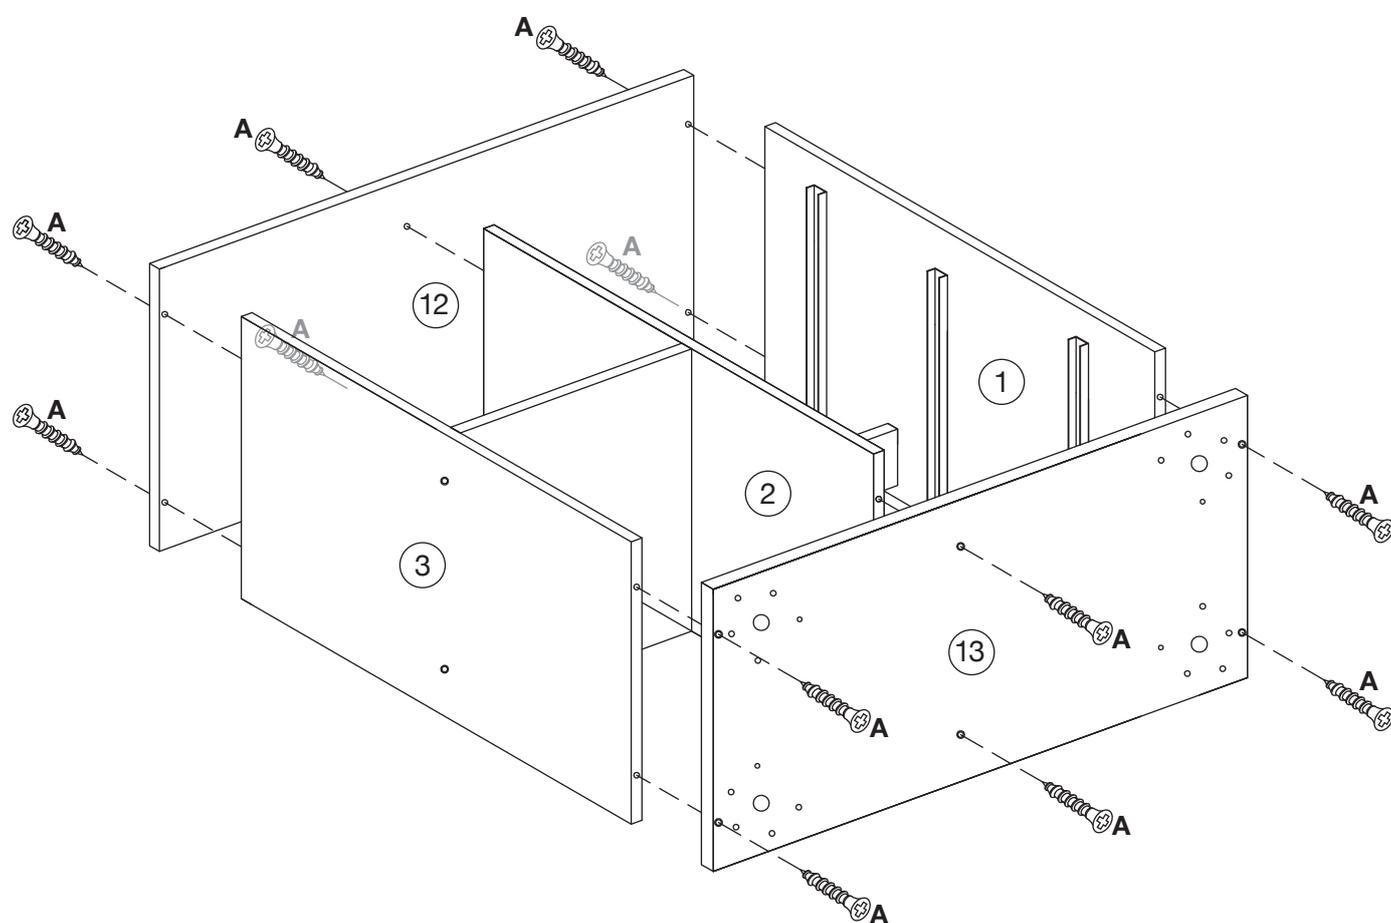


# Utility Cabinet with 3 Drawers

## STEP 6

Fix part 6 to parts 1, 2, 12 and 13 using nails (N), as shown.


Fix leg supports (C) to part 13 using screws (D), as shown.

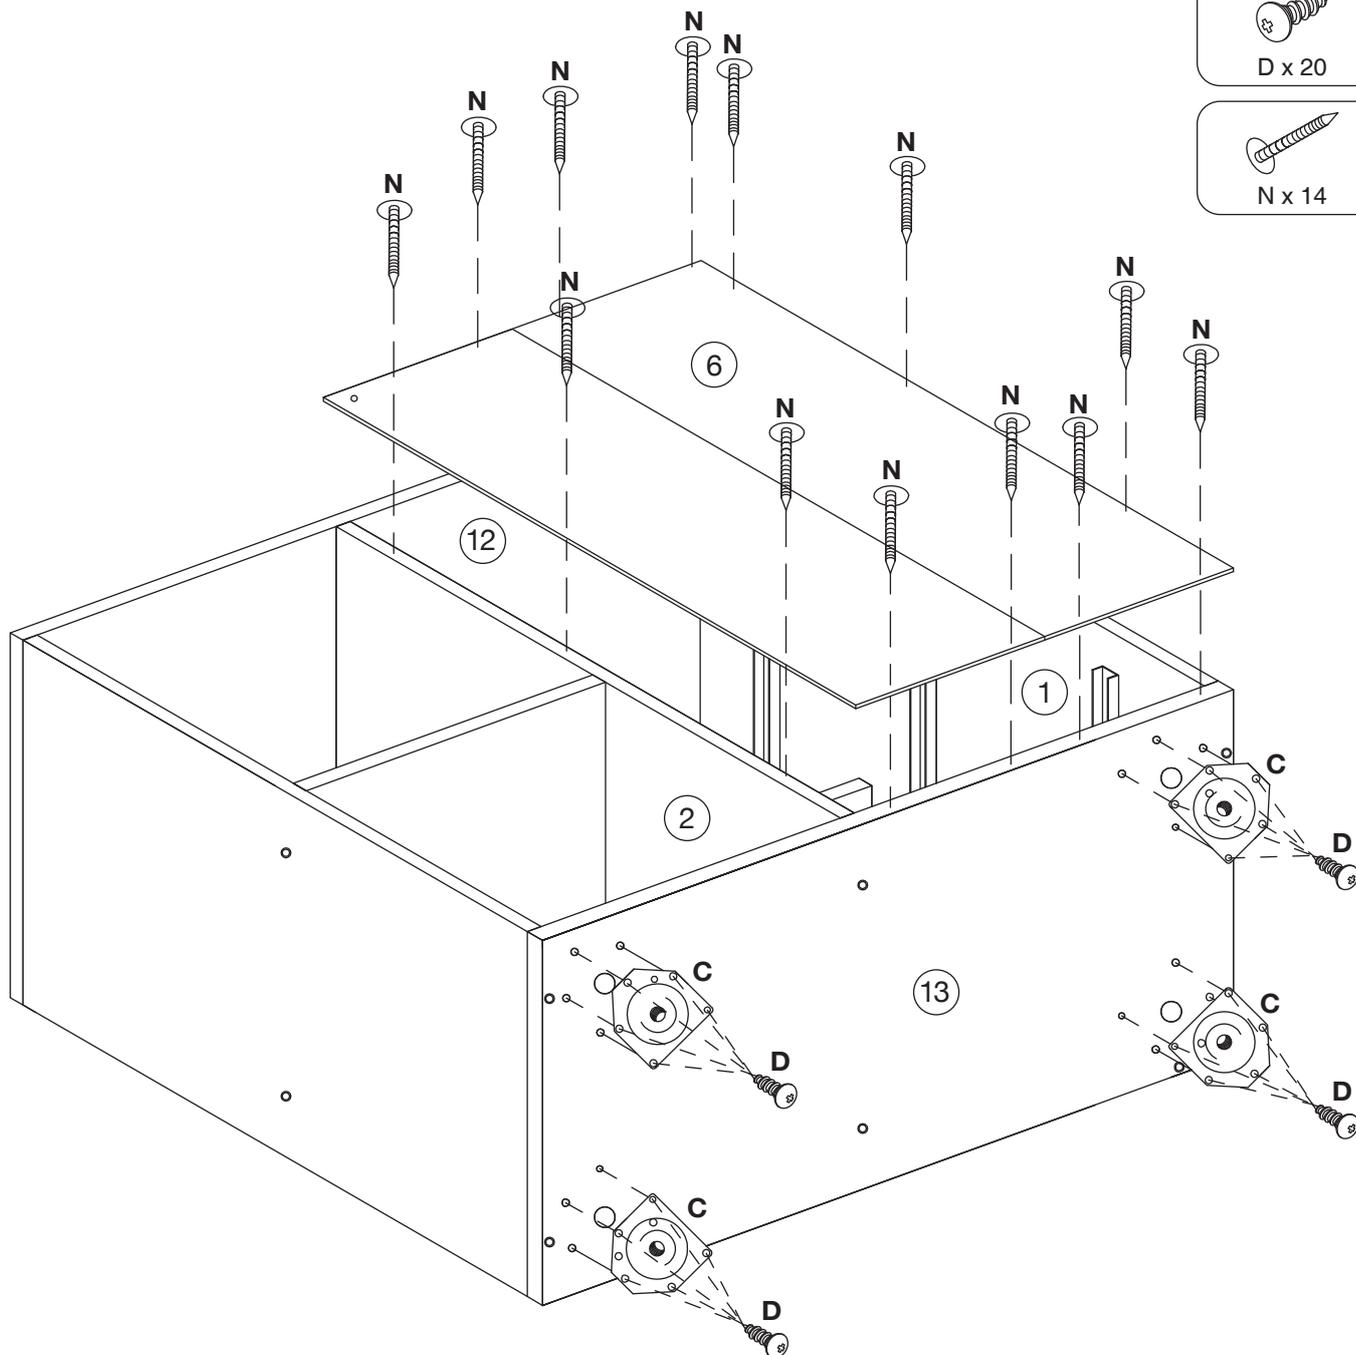

# Utility Cabinet with 3 Drawers


## STEP 7

Fix part 7 and 8 to part 9 using screws (A), as shown.

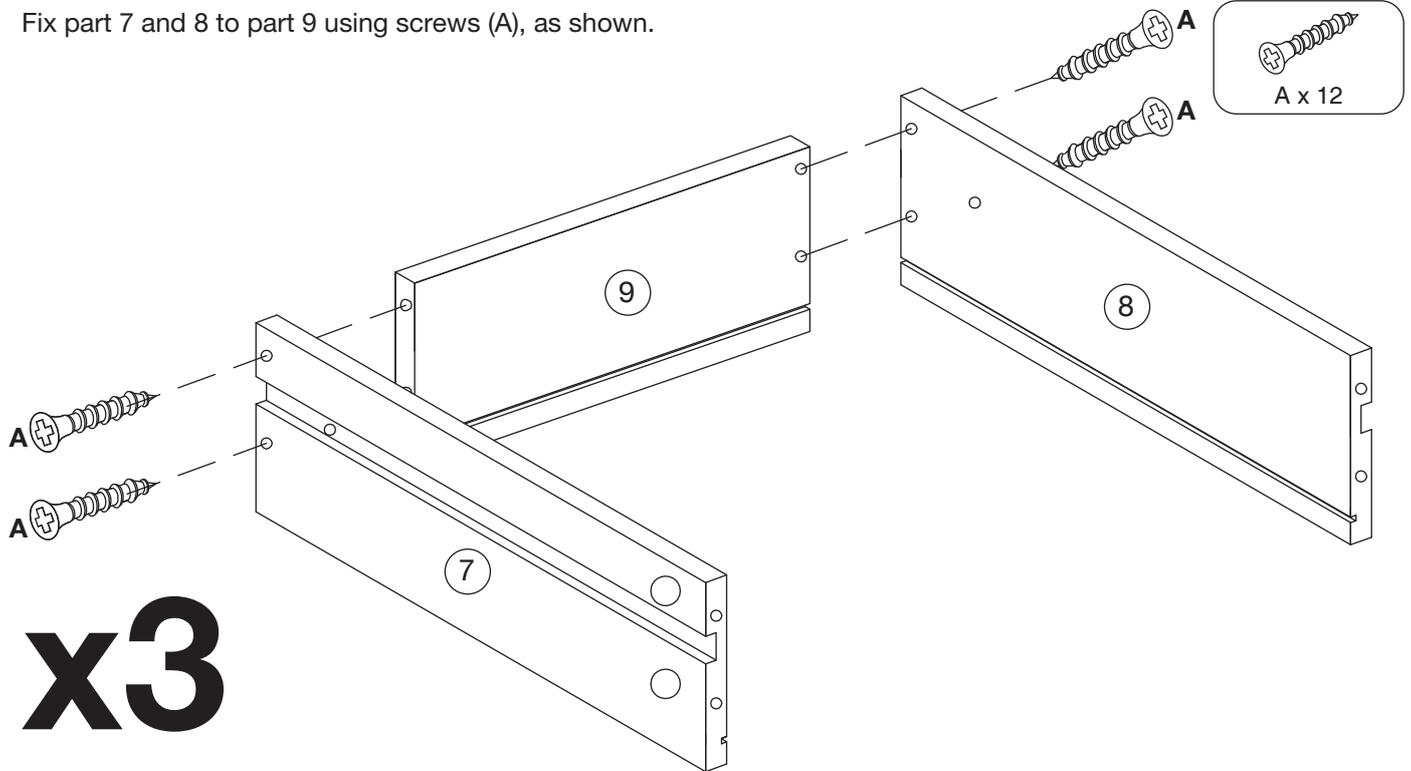

## STEP 8

Insert part 11 into grooves between parts 7, 8 and 9, as shown.

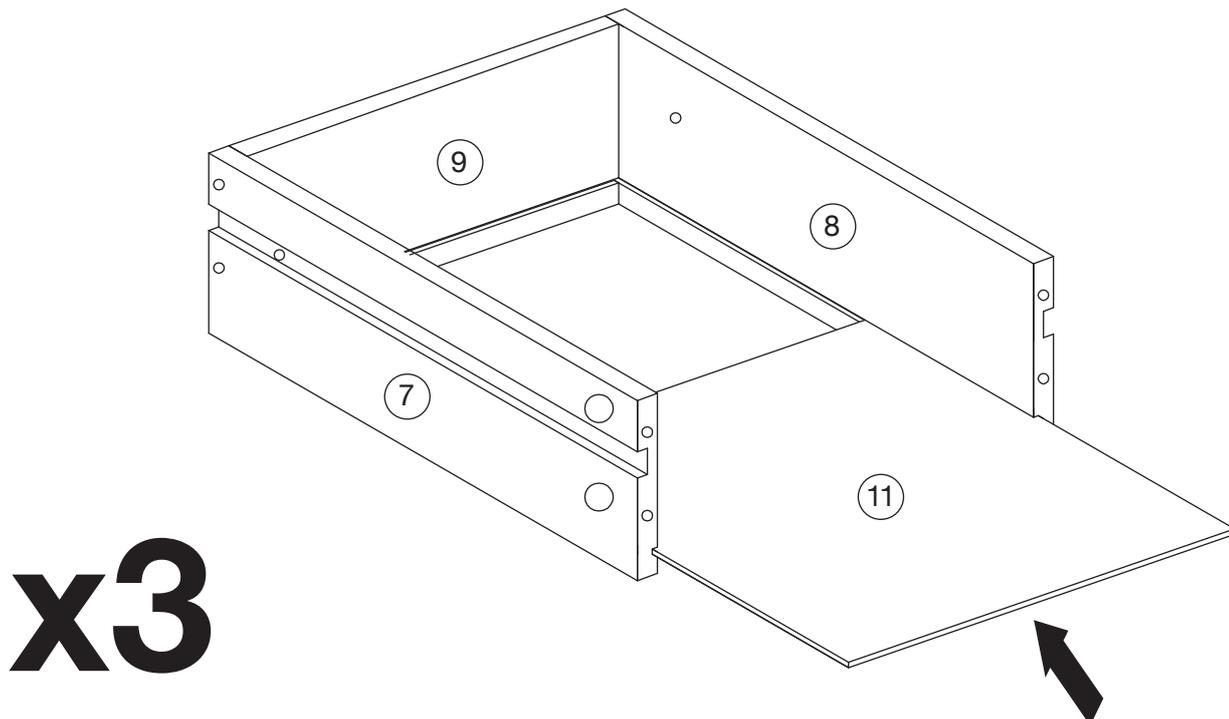

# Utility Cabinet with 3 Drawers

## STEP 9

Insert quickfit screws (I) to part 10 and insert camlocks (j) to parts 7 and 8, as shown.

Attach part 10 to parts 7 and 8.


Turn cam lock clockwise to tighten.



I x 12



J x 12

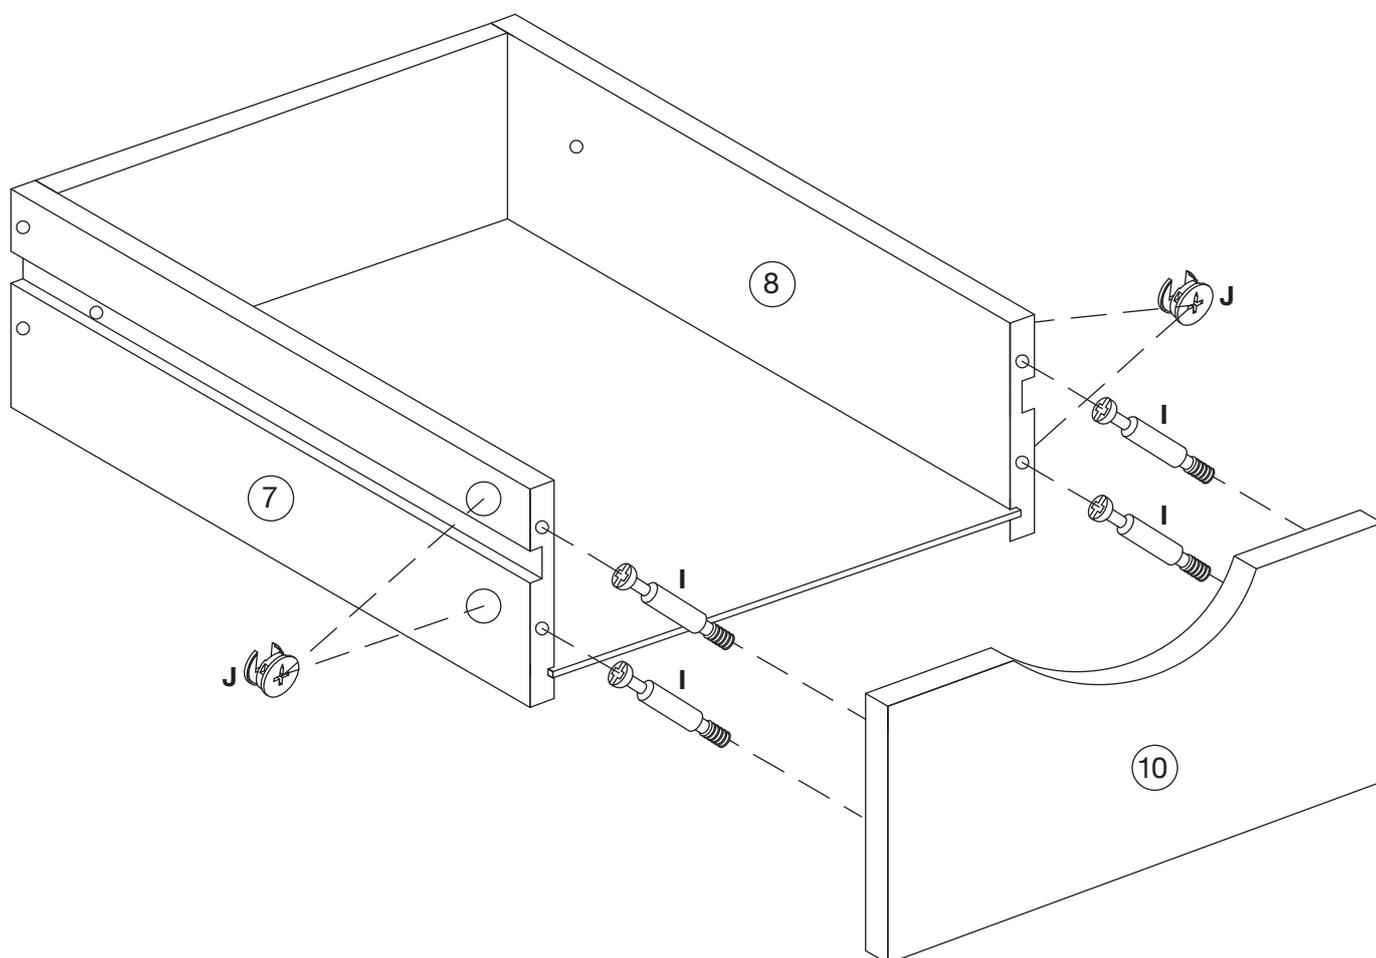





**x3**

# Utility Cabinet with 3 Drawers

## STEP 10

Fix wall strap (F) to part 12 using screw (D) and washer (E).

Fix legs 14 by rotating clockwise to leg supports attached to part 13, as shown.

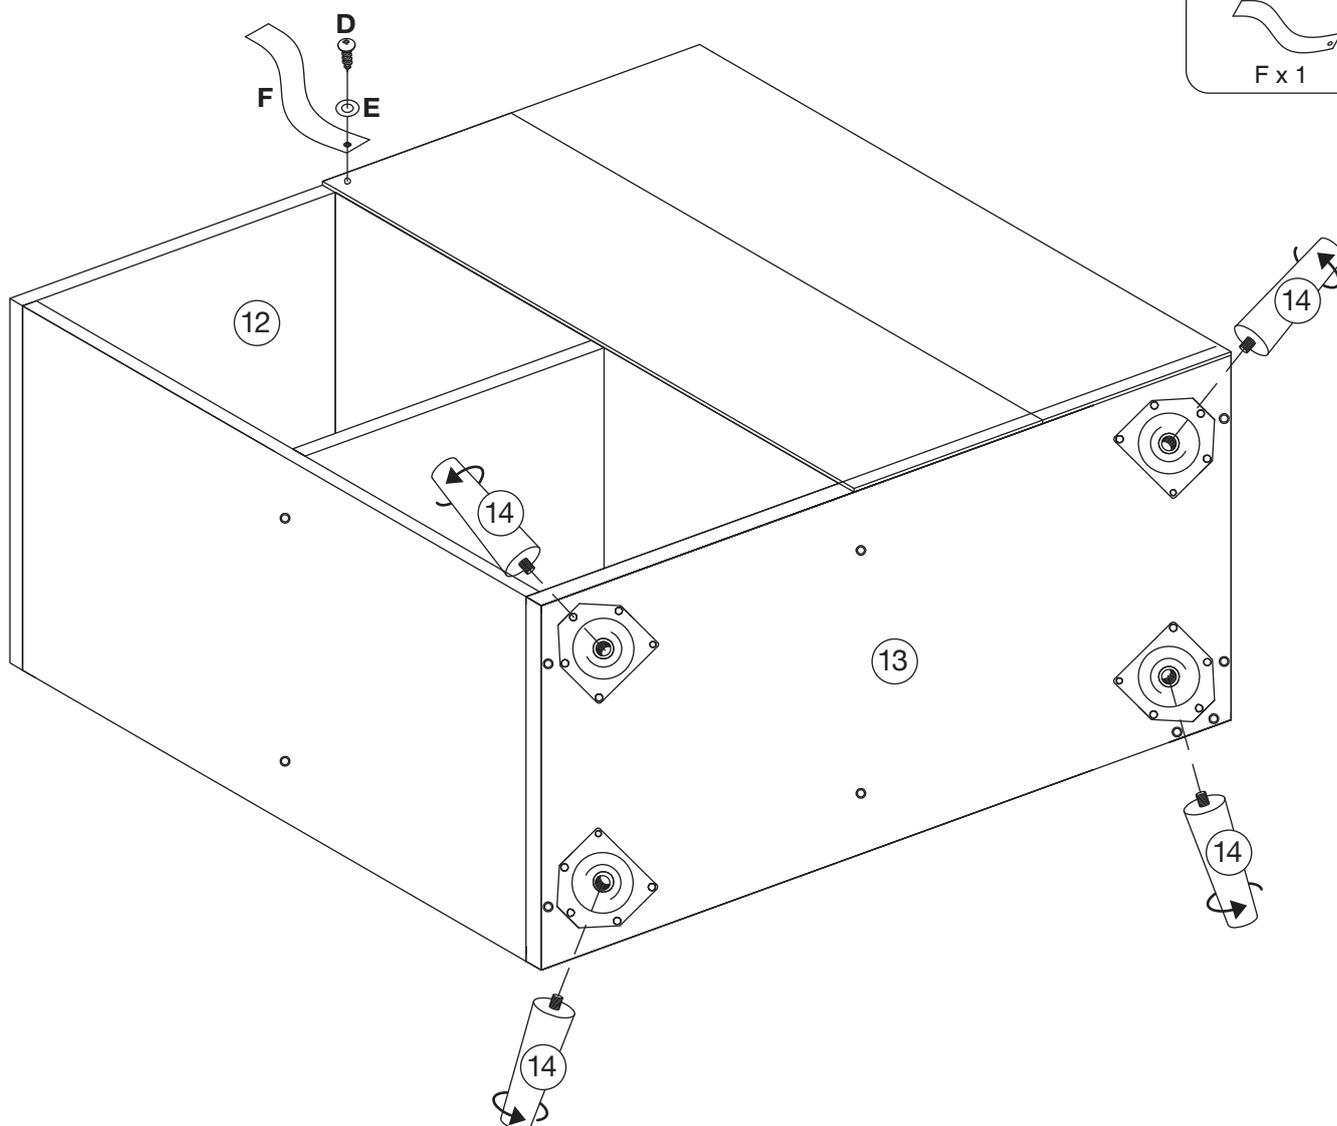


# Utility Cabinet with 3 Drawers

## STEP 11

For extra stability, you must fix your cabinet to the wall using the additional hardwares (A, E and G), as shown.

Screw (A) is fixed through washer (E) and wall strap (F) and into the wall plug (G).

Should you choose not to affix the product to the wall, serious injury may be caused if the product tips over.

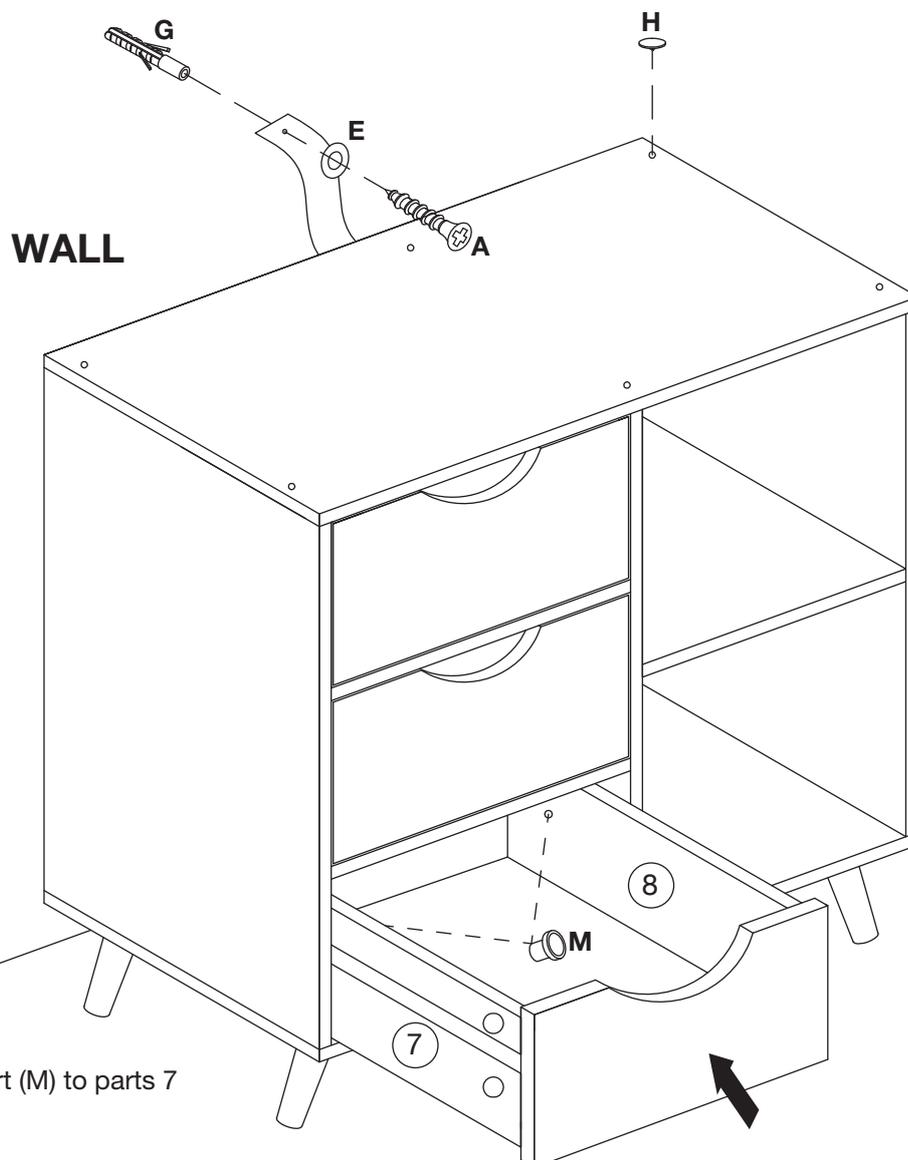

A x 1



E x 1



G x 1



H x 8



M x 6

Insert drawer support (M) to parts 7 and 8, as shown.

Attach covers (H) to assembled cabinet.

Insert drawer into assembled cabinet.

Your Utility Cabinet with 3 Drawers is ready for use.

**Maximum recommended weight for each shelf is 2kg, top is 20kg and 2kg for drawers.**

# Utility Cabinet with 3 Drawers

## WALL FIXING GUIDE

**NOTE: Supplied wall plugs are only suitable for use in masonry walls.**

If you have any doubts about using the correct plug for your wall, please seek professional advice. Failure of the product due to using incorrect fixings is the responsibility of the installer.



### IMPORTANT:

When drilling into walls, always check for hidden wires or pipes, etc.




## Tips & Tricks

**Make sure that the hardware used is suitable for supporting your unit. Please consult a qualified tradesperson if unsure.**

- If you are unsure, please select a larger screw and wall plug.
- Ensure that you use the recommended drill bit to match the wall plug and hole size.
- Take extra care when drilling high walls, ceiling and ceramic tiles. Ensure wall plugs are inserted beyond the thickness of the ceramic tiles to avoid splitting or cracking.
- Ensure that wall plugs are well fitted and are a tight fit in the drilled hole.


## Types of Walls

Use one of the following types of wall plug (not included) if your walls are made of brick, breeze block, concrete, stone or wood. Screws may be able to be fixed directly to solid wood walls as they will provide a secure anchor point.

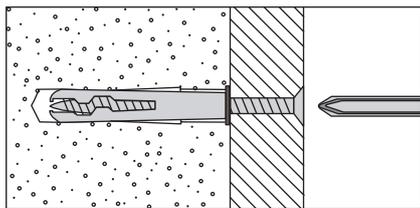


### 1. General Purpose Wall Plug

Generally, aerated blocks should not be used to support heavy loads, use a specialist fitting in this case. For light loads, general purpose wall plugs can be used.

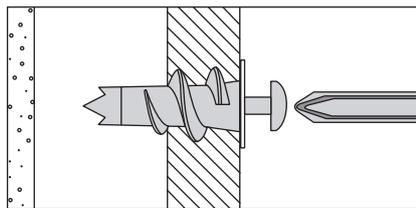


### 2. Plasterboard Wall Plug

For use when attaching light loads onto plasterboard partitions.

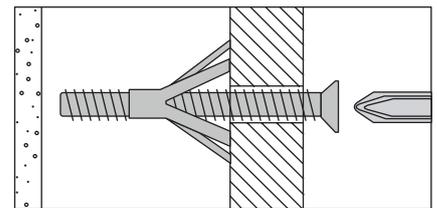


### 3. Cavity Fixing Wall Plug

For use with plasterboard partitions or hollow wooden doors.

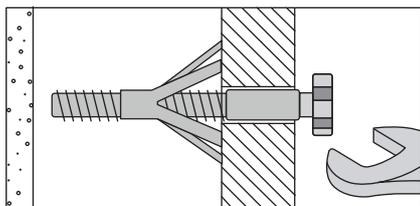


### 4. Cavity Fixing Heavy Duty Wall Plug

For use when fitting or supporting heavy loads such as shelving and wall cabinets.

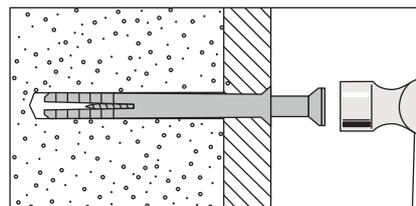

### 5. Hammer Fixing Wall Plug

For use with concrete block or brick walls, or walls stuck with plasterboard. The hammer fixing allows it to be fixed to the wall rather than the plasterboard. Always check the fixing is secure to the retaining wall.

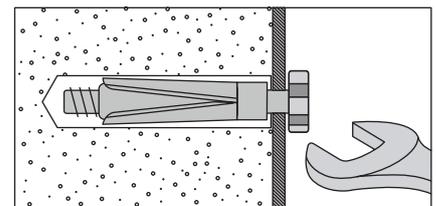

### 6. Shield Anchor Wall Plug Heavy Loads

For use with concrete or brick walls, or for use with heavier loads such as TV & HiFi speakers and satellite dishes, etc.